

# Malleable Conduit Accessories

- Black Enamel


## NORSLO

- + Available in Hot Dip Galvanised Steel or Black Enamel
- + Conforms to BS EN 61386-21

Malleable Conduit Classification	
Resistance to compression	<b>5- Very Heavy</b>
Resistance to impact	<b>5- Very Heavy</b>
Resistance against corrosion	<b>4- High Protection</b>
Resistance to bending	<b>1- Rigid</b>
Tensile Strength	<b>5- Very Heavy</b>
Suspended Load Capacity	<b>5- Very Heavy</b>



### Dimension Diagram

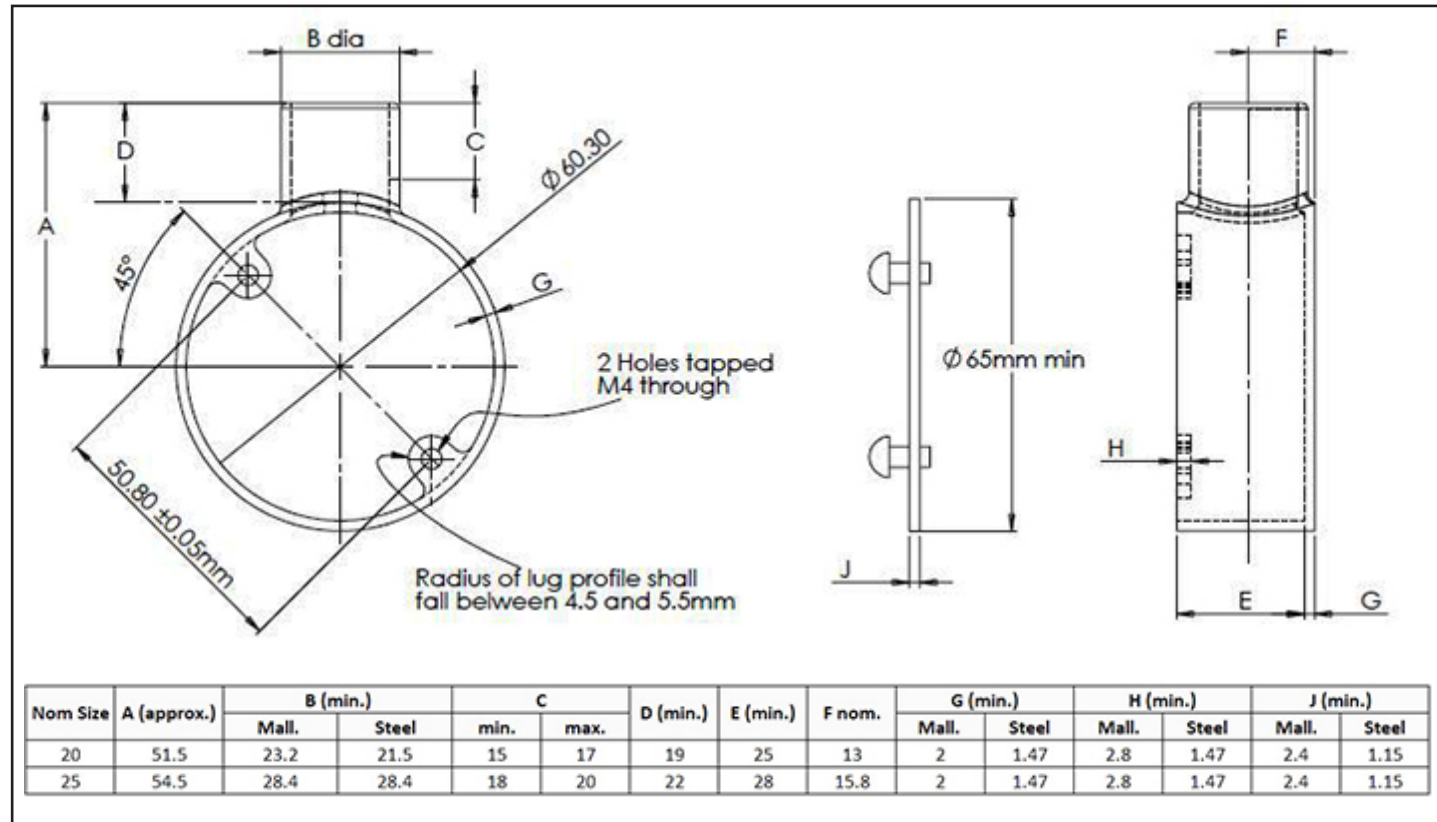

TECHNICAL DATA SHEET


# Malleable Conduit Accessories

- Black Enamel

## NORSLO

+ Available in Hot Dip Galvanised Steel or Black Enamel

+ Conforms to BS EN 61386-21

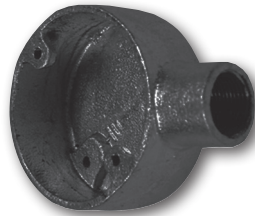

	<b>20B1</b>	<b>25B1</b>	<b>20B2</b>	<b>25B2</b>	<b>20B3</b>	<b>25B3</b>	<b>20B4</b>	<b>20B5</b>	<b>25B5</b>
<b>Description</b>	Terminal Box	Terminal Box	Through Box	Through Box	Tee Box	Tee Box	Intersection Box	Angle Box	Angle Box
<b>Pack Qty</b>	10	10	10	10	10	10	10	10	10
<b>Barcode</b>	5012739 609466	5012739 609909	5012739 609473	5012739 609916	5012739 609480	5012739 609923	5012739 609497	5012739 609503	5012739 609947
<b>Galv Plating Thickness</b>	>45µm	>45µm	>45µm	>45µm	>45µm	>45µm	>45µm	>45µm	>45µm
<b>Material</b>	Black Enamel								
<b>IP Rating</b>	IP30								
<b>Application Temp</b>	<5°C to - 45°C								
<b>Thread Diameter</b>	Ø 20mm	Ø 25mm	Ø 20mm	Ø 25mm	Ø 20mm	Ø 25mm	Ø 20mm	Ø 20mm	Ø 25mm
<b>Guarantee</b>	1 Year								
<b>Conforms To</b>	BS EN 61386-21								

# Malleable Conduit Accessories

- Black Enamel

## NORSLO

+ Available in Hot Dip Galvanised Steel or Black Enamel

+ Conforms to BS EN 61386-21



	<b>20BU</b>	<b>20BY</b>	<b>25BY</b>	<b>B20B1E</b>	<b>B20BT3</b>	<b>B20BBO</b>	<b>B20B1B0</b>
<b>Description</b>	U Box	Y Box	Y Box	Terminal Extension Box	Tee Tangent Box	Back Outlet Box	Terminal Back Outlet Box
<b>Pack Qty</b>	10	10	10	10	10	10	10
<b>Barcode</b>	5012739 609442	5012739 609459	5012739 609893	5012739 609176	5012739 609145	5012739 609138	5012739 609169
<b>Galv Plating Thickness</b>	>45µm	>45µm	>45µm	>45µm	>45µm	>45µm	>45µm
<b>Material</b>	Black Enamel						
<b>IP Rating</b>	IP30						
<b>Application Temp</b>	<5°C to - 45°C						
<b>Thread Diameter</b>	Ø 20mm	Ø 20mm	Ø 25mm	Ø 20mm	Ø 20mm	Ø 20mm	Ø 20mm
<b>Guarantee</b>	1 Year						
<b>Conforms To</b>	BS EN 61386-21						

TECHNICAL DATA SHEET