

# Earthing Products

- Premium Range

## NORSLO

+ Conforms to BS 7430



**NRC38**




**NC38**



**RC58**



**DS58**

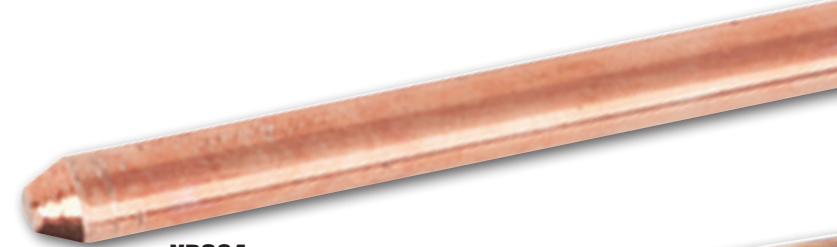

**NR384**



**NR584**



**20ET**

|                       | <b>NR384</b>                 | <b>NR584</b>                 | <b>NRC38</b>      | <b>NC38</b>        | <b>NC58</b>        | <b>RC58</b>                                   | <b>DS58</b>                         | <b>20ET</b>       | <b>25ET</b>       |
|-----------------------|------------------------------|------------------------------|-------------------|--------------------|--------------------|---|-------------------------------------|-------------------|-------------------|
| <b>Description</b>    | Earth Rod Non-extendable     | Earth Rod Extendable         | Lug to Rod Clamp  | Cable to Rod Clamp | Cable to Rod Clamp | Rod Coupling (for joining 5/8" rods together) | Driving Bolt (For NR584 earth rods) | Earth Tags        | Earth Tags        |
| <b>Pack Qty</b>       | 1                            | 1                            | 1                 | 1                  | 1                  | 1   | 1                                   | 100               | 100               |
| <b>Barcode</b>        | 5012739<br>622267            | 5012739<br>622281            | 5012739<br>622304 | 5012739<br>622021  | 5012739<br>622045  | 5012739<br>624001                             | 5012739<br>618376                   | 5012739<br>612879 | 5012739<br>613395 |
| <b>Material</b>       | Copper bonded to 250 microns | Copper bonded to 250 microns | Alloy             | Alloy              | Alloy              | Alloy   | Steel                               | Brass             | Brass             |
| <b>Product Weight</b> | 580g                         | 1600g                        | 6.9g              | 3.2g               | 5.7g               | 9.3g  | 8.8g                                |                   |                   |
| <b>Dimensions</b>     | 3/8" x 4ft                   | 5/8" x 4ft                   | 3/8"              | 3/8"               | 5/8"               | 5/8"  | 5/8"                                | Ø20mm             | Ø25mm             |
| <b>Guarantee</b>      | 1 Year                       |                              |                   |                    |                    |   |                                     |                   |                   |
| <b>Conforms To</b>    | BS 7430                      |                              |                   |                    |                    |   |                                     |                   |                   |

TECHNICAL DATA SHEET