


# RELAYS


# Plug-In Relays and Bases

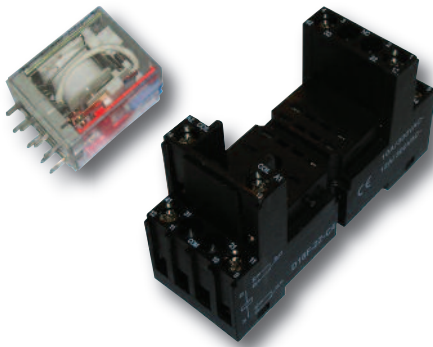

- 2 and 4 Pole - Square Terminal Footprint
- All standard coil voltages
- Competitively priced
- With LED / flag / button as standard
- DIN rail bases

### Technical Data

- IP40
- Contact material is silver alloy
- Contact rating: 2 pole is 10A 250V AC, 4 pole is 5A 250V AC
- AC coil consumption: 24 to 230V AC - 1.2VA
- DC coil consumption: 24V DC - 0.9W
- UL / CSA

	PART NO.	DESCRIPTION	DIMENSIONS
	<p>PRS208-24DC</p> <p>PRS208-24AC</p> <p>PRS208-115AC</p> <p>PRS208-230AC</p>	2 Pole Changeover	L27 x W21 x H43
	PRSB8-B	DIN Rail Base for 2 Pole changeover	L75 x W27 x H43mm
	<p>PRS414-24DC</p> <p>PRS414-24AC</p> <p>PRS414-115AC</p> <p>PRS414-230C</p>	4 Pole Changeover	L27 x W21 x H43
	PRSB14-B	DIN Rail Base for 4 Pole changeover	L75 x W27 x H43mm

- 2 and 3 Pole - Round Terminal Footprint
- All standard coil voltages
- Competitively priced
- With LED / flag / button as standard
- DIN rail bases



## Technical Data

- IP40
- Contact material is silver alloy
- Contact rating: 10A 250V AC
- AC coil consumption: 24 to 230V AC - 1.2VA
- DC coil consumption: 24V DC - 0.9W
- UL / CSA

PART NO.	DESCRIPTION	DIMENSIONS	
<p>PRR208-24DC PRR208-24AC PRR208-115AC PRR208-230AC</p>	2 Pole Changeover	L36 x W38 x H69	
PRRB8-B	DIN Rail Base for 2 Pole Changeover	L62 x W38 x H26mm	
<p>PRR311-24DC PRR311-24AC PRR311-115AC PRR311-230AC</p>	3 Pole Changeover	L36 x W38 x H69	
PRRB11-B	DIN Rail for 3 Pole Changeover	L62 x W38 x H26mm	