

IP20 3W LED EMERGENCY EXIT SIGN

- Maintained

GREEN
BROOK
ELECTRICAL

- + Wall/ceiling exit sign
- + Separate kits available for recessed, suspended and flag mounting (see page 2)
- + Viewing distance 30M
- + LED Indicator
- + Supplied with arrow up legend (see below for full legend part no's)
- + Other options available - Self test & Black finish
- + Emergency operation duration 3 hours




RAZEMEXITSGNUP

Black Frame Option - Special Order

RAZEMEXITSGNUP

Description	Led Exit Sign supplied with 'Up' legend
Barcode	5012739654770
Voltage	220-240V ~ 50.60Hz
Emergency Power	3W
Emergency Lumens	22.84 lumens
IP Rating	IP20
Viewing Distance	30M
Emergency Duration	3 Hours
Colour Temperature	6500K
Ambient Temperature	5°C - 45°C
Function	Maintained
Battery Type	LiFePO4 3.2V 1.1Ah
Dimensions (mm)	L313 x W212 x D42mm
Beam Angle	235°
Mounting Type	Ceiling / Wall Mounting Kits available for:- Suspended, Recessed & Flag
Material	Polycarbonate
RAL Colour	RAL 9003
Product Weight	512g
Guarantee	3 years
Conforms To	BS EN 60598-2-22:2014+A1 BS EN IEC 60598-1:2021 BS EN 62471:2008 BS EN 62493:2015

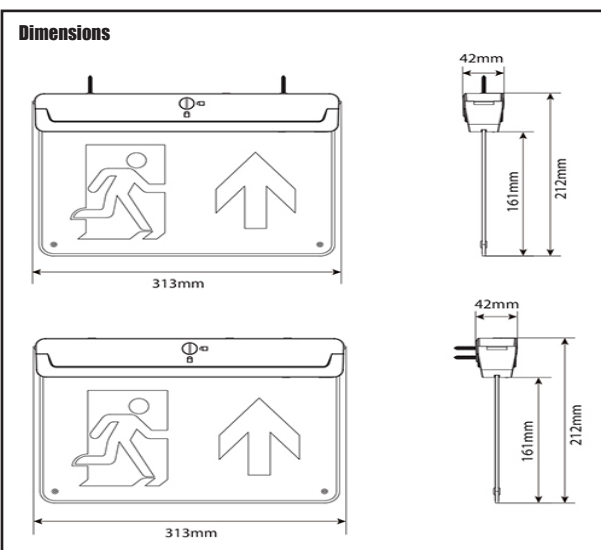

RAZEMEXITSGNUP

Wall Mounted



RAZEMEXITSGNUP

Ceiling Mounted



RAZLEGDOWN

Down Arrow Legend



RAZLEGLR

Reversible Left & Right Arrow Legend

GREEN
BROOK
ELECTRICAL

Tel: 01279 772 772

Fax: 01279 422 007

Email: sales@greenbrook.co.uk

www.greenbrook.co.uk



IP20 3W LED EMERGENCY EXIT SIGN

- Mounting Kits



RAZSUSPKIT - Suspension Mounting Kit

Image shows:-
Fitting - RAZEMEXITSGNUP
Suspension Kit - RAZSUSPKIT



RAZRECKIT - Recess Mounting Kit


Image shows:-
Fitting - RAZEMEXITSGNUP
Recess Kit - RAZRECKIT



RAZFLAGMNTKIT - Flag Mounting Kit

Image shows:-
Fitting - RAZEMEXITSGNUP
Flag Kit - RAZFLAGMNTKIT

NOTE: The above kits are for use with the RAZEMEXITSGNUP
All kits are the bracket frames only as shown above.

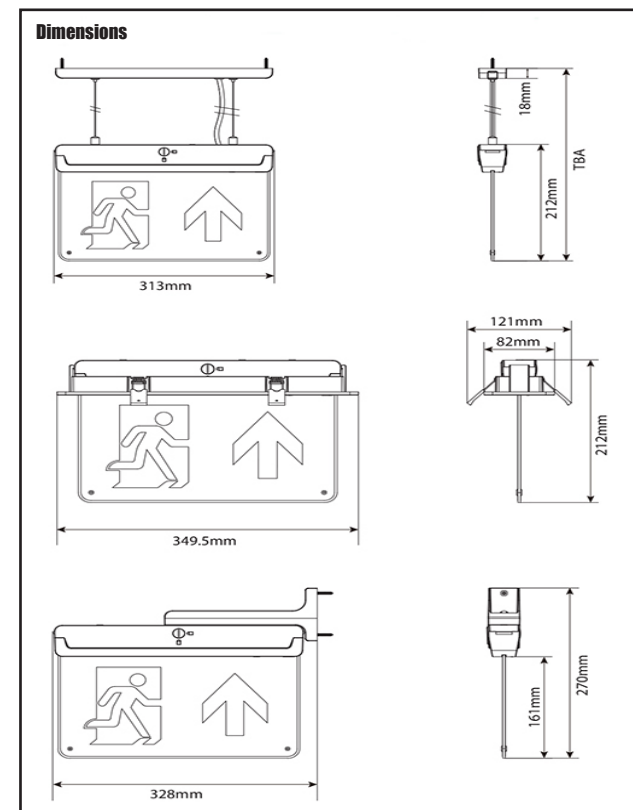

	RAZSUSPKIT	RAZRECKIT	RAZFLAGMNTKIT
Description	Suspension Mounting Kit for RAZEMEXITSGNUP	Recess Mounting Kit for RAZEMEXITSGNUP	Flag Mounting Kit for RAZEMEXITSGNUP
Barcode	5012739654800	5012739654794	5012739654787
Material	Polycarbonate		
RAL Colour	RAL 9003		
Product Weight	212g	204g	130g
Guarantee	3 years		
Conforms To	BS EN 60598-2-22:2014+A1 BS EN IEC 60598-1:2021 BS EN 62471:2008 BS EN 62493:2015		