RCD Switched Sockets - 30mA Passive

- Mechanically latched (does not need resetting after a power loss) ÷
- Red & Green dual flag system to show power on/off
- High intensity LED power on indicator ÷
- Cuts the power for added protection against electrocution ÷
- Twin earth terminals on Twin sockets
- White sockets fit standard 35mm back box ÷






Tel: 01279 772 772 Fax: 01279 422 007 Email: sales@greenbrook.co.uk www.greenbrook.co.uk


BS 7288-2016











K22-WP

12.5				
	K21-WP	K22-WP	K21-MP	K22-MP
	White	White	Metalclad	Metalclad
	5012739646843	5012739646850	5012739646867	5012739646966
	152g	236g	358g	529g
	86.5 x 86.5 x 12mm	147.5 x 86.5 x 12mm	86 x 86 x 49mm	147.5 x 86.5 x 49mm
	230V AC ~ 50Hz			
	13A (13A Inductive)			
	IP40			
	30mA			
	Less than 20mS (typical)			
	Double Pole			
	250A			
	1500A Power Factor Range .93 to .98			

Mechanical - No need to reset after Power Loss (Passive)


Pulsating DC earth faults

1 Year

BS 7288-2016 / BS 1363-2:2016

Steel

Urea



Product Finish Barcode **Product Weight Product Dimensions**

Voltage Max Operating Current

> **IP** Rating **Rated Trip Current**

Typical Trip Speed

RCD Contact Break Rated Short Circuit Breaking

& Making Capacity

Rated Conditional

Short-Circuit Current Latching

Responsive To

Main Housing Material

Guarantee

Conforms To

K21-MP

86.5




-Power-Breaker-

RCD Unswitched Sockets - 30mA Passive


-Power-Breaker-

- + Mechanically latched (does not need resetting after a power loss)
- + Red & Green dual flag system to show power on/off
- High intensity LED power on indicator +.
- + Cuts the power for added protection against electrocution
- + Twin earth terminals
- + H22-WP fit standard 35mm back box



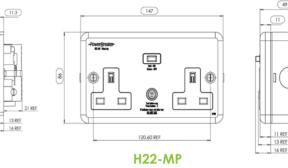

Ð

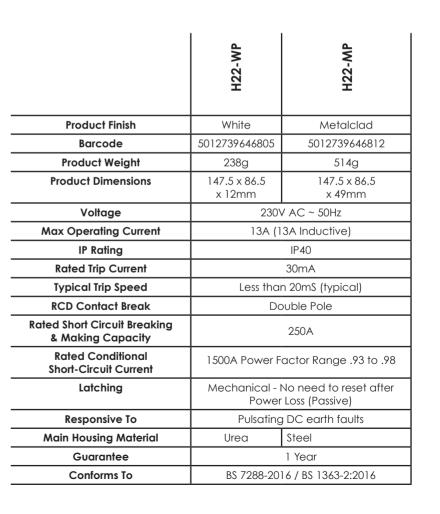



6





Fax: 01279 422 007 Email: sales@greenbrook.co.uk www.greenbrook.co.uk

Type A RCD BS 7288-2016