

## 1A Din Rail Mains Transformer

### Part No: DAT02A

Use this transformer in conjunction with any of the GreenBrook hardwired doorchimes when you want to have an illuminated door push.

- Use with illuminated doorpushes or when converting a doorpush to an illuminated push.


Please read the instructions fully before attempting installation.

**Note: This unit should be installed by a competent person in accordance with the current IET Wiring Regulations. If in doubt consult a qualified electrician.**


## INSTALLATION

This transformer is designed to to be DIN rail mounted.

1. Connect mains cable to Mains in terminals and secure cable to prevent movement. Mains in should be supplied by a 3A fuse or M.C.B. See Dia.1.



2. Connect the chime bellwire to the 8V terminals on the transformer and terminals D and C on a GreenBrook wired doorchime. See Dia.2 below. This gives the required 8V output.

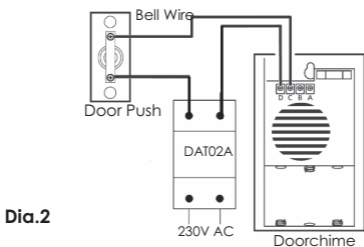

3. Switch the power on to transformer and check operation.

### TECHNICAL INFORMATION

Rated Voltage:	230V 50Hz
Output Load:	4V, 8V or 12V, 1A
Dimensions:	H91 x W36 x D65mm
Conforms To:	EN 300220-3, EN 301489-3 & EN 60950-1

#### GUARANTEE

Your GreenBrook 1A Transformer DAT02A is guaranteed for 1 year from the date of purchase. This is in addition to your statutory rights.

PLEASE KEEP THESE INSTRUCTIONS  
SAFE FOR FUTURE REFERENCE