


Porcelain Connectors

- Rated IP20


**GREEN
BROOK**
ELECTRICAL

NORSLO

- + Nickel plated Brass terminals
- + White ceramic body
- + Max temperature of operation: 350°C
- + Chemical resistant
- + Galvanised steel screws
- + 2, 3 & 4 Pole complete with central hole fixings
- + Non-flammable
- + Conforms to BS EN60998

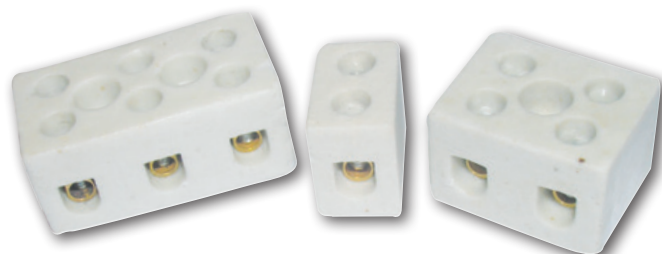

Dimensions

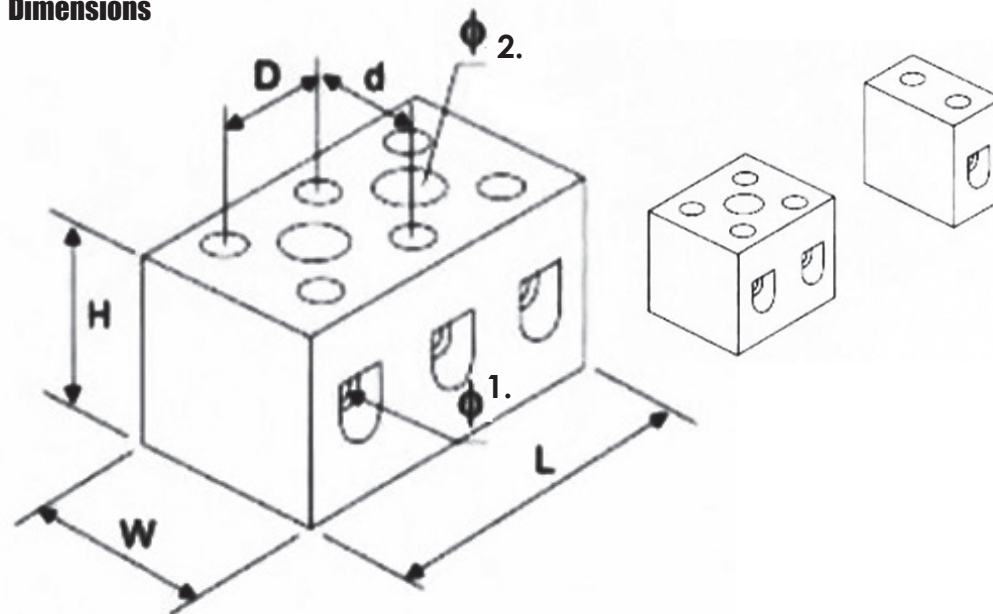


Part No	Dimensions (mm)						
	W	L	Ø1	Ø2	D	d	H
PC51	13	12	3.2	-	-	8	16
PCC52	18	21	3.2	4.5	12	8	16
PCC53	18	33	3.2	4.5	12	8	16
PCC152	21	24	4.3	4.8	14	10	20
PCC153	21	36	4.3	4.8	14	10	20
PCC154	21	49	4.3	4.9	13	10	20
PC301	27	15	6.1	-	-	12	22
PCC302	27	31	6.1	5.0	17	12	22
PCC303	27	48	6.1	5.0	17	12	22

NORSLO

Porcelain Connectors

- Rated IP20

GREEN
BROOK
ELECTRICAL

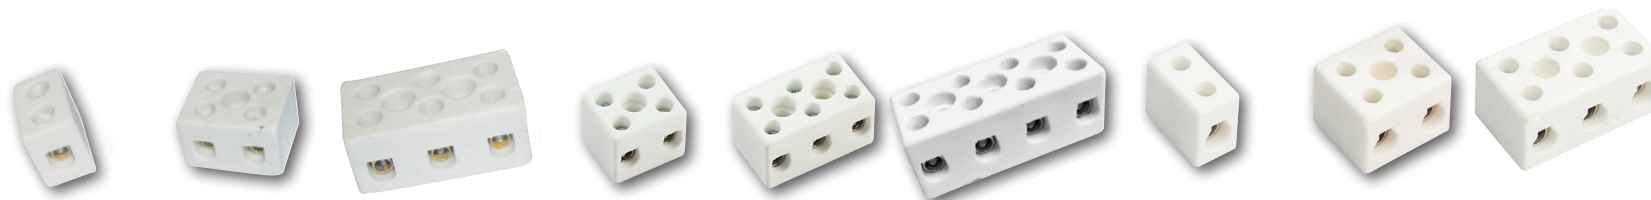

	PC51	PCC52	PCC53	PCC152	PCC153	PCC154	PC301	PCC302	PCC303
Description	5A Porcelain Connector	5A Porcelain Connector	5A Porcelain Connector	15A Porcelain Connector	15A Porcelain Connector	15A Porcelain Connector	30A Porcelain Connector	30A Porcelain Connector	30A Porcelain Connector
Pack Qty	25	25	10	20	10	5	20	10	10
Barcode	5012739 622687	5012739 622748	5012739 622687	5012739 622755	5012739 622717	5012739 649011	5012739 622670	5012739 622724	5012739 622731
Current Range	5 - 32A			15 - 57A			30 -76A		
Rated Voltage	450V								
No of Poles	1 Pole	2 Pole	3 Pole	2 Pole	3 Pole	4 Pole	1 Pole	2 Pole	3 Pole
Fixing Holes	0	1 x 4mm	2 x 4mm	1 x 5mm	2 x 5mm	3 x 5mm	0	1 x 5mm	2 x 5mm
Material	White Ceramic								
Product Weight	9g	14.2g	21.4g	23.4g	35.7g	50g	20.7g	42.5g	66.2g
Guarantee	1 Year								
Conforms To	BS 60998								