

Installation Instructions for Cylinder Thermostat - TH90CS-C


Cylinder thermostat with switch contacts complete with cable clamp. This model is suitable for measuring temperatures on hot water cylinders or pipes.

Thermostat clamping is achieved by means of a spring-band, assuring good contact and fixing to tanks.

Important:

This product should be installed by a competent person and in accordance with the current IET Wiring Regulations. If in doubt consult a qualified electrician.

TERMINAL CONNECTION

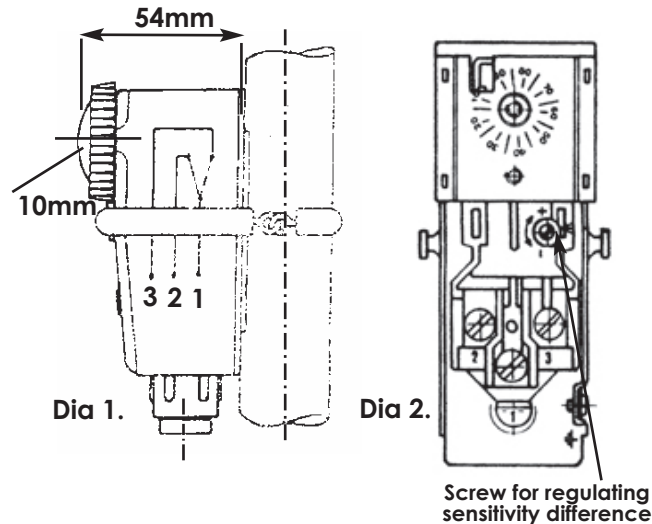

Terminal Connection:

- Terminal 1.** - Common inlet
- Terminal 2.** - Outlet (opens the circuit with increasing temperature)
- Terminal 3.** - Outlet (closes the circuit with increasing temperature)



TECHNICAL INFORMATION

Temperature Range:	10°/90°C
Temperature Differential:	Dt 5° + 10°C
Contacts:	Ag
Contacts Rating:	15A (2.5) 230V
Number of Automatic Cycles:	II (100,000)
Temperature Rate of Change:	1°C/min
Degree of Protection:	IP20

GUARANTEE

Your GreenBrook Cylinder Thermostat
TH90CS-C is guaranteed for 1 year from
the date of purchase.
This is in addition to your statutory rights.

**PLEASE KEEP THESE INSTRUCTIONS
SAFE FOR FUTURE REFERENCE**