


TECHNICAL WIRING INFORMATION

QUICK ConneKt +4




- 20A Lighting Connector - for 4 core Flex
Wiring Diagram

LCGN4PLS - Wiring (Quick push-fit Terminals)

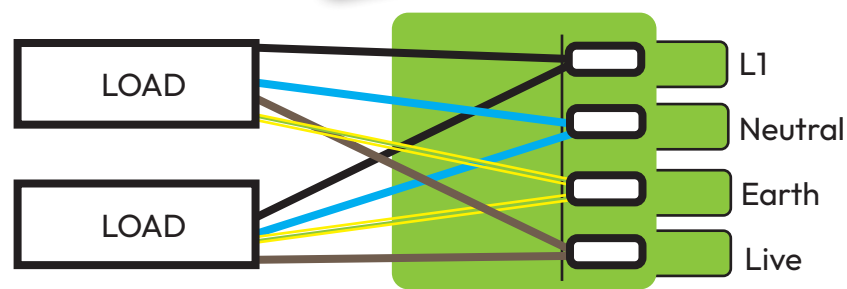

Load (Male) - Pins

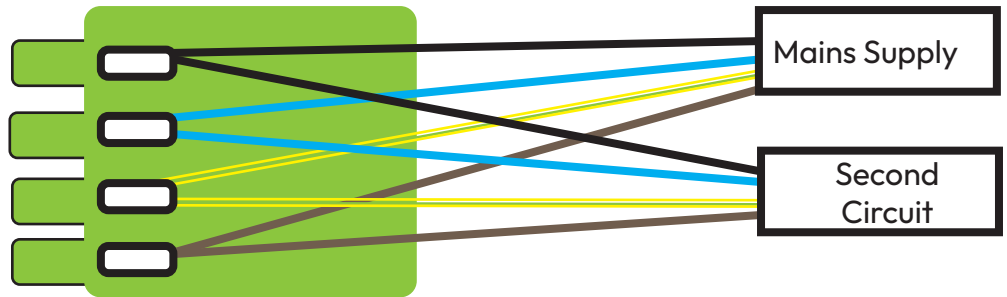

Supply (Female) - Socket

2 x cable entries
Each Terminal can be fitted with upto
with upto
2 x 2.5mm² Solid 4 Core Max
or
2 x 2.5mm² 3 Core Flex

Note: Moulding states '4 x 2.5mm²' - this means 4 core 2.5mm² cable can be used.

2 x cable entries
Each Terminal can be fitted with upto
upto
2 x 2.5mm² Solid 4 Core Max
or
2 x 2.5mm² 3 Core Flex

