




# SAFETY/SURE

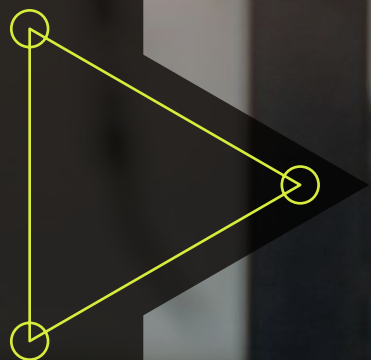

## Switched & Unswitched Sockets

SafetySure Sockets are available in switched or unswitched versions, they have separate test and reset buttons and are available in white plastic or metalclad.

SafetySure RCD Fused Connection Units have separate test and reset buttons and are available in white plastic or metalclad. SafetySure RCD products fully conform to British Standards.

- ✓ **Mechanical flag trip indicators**
- ✓ **Mechanically latched (Passive) - no need to reset after a power loss**
- ✓ **All products have separate 'Test' & 'Reset' buttons**
- ✓ **Metalclad all supplied with metal back boxes**
- ✓ **1 Year Guarantee**

TECHNICAL INFORMATION	
<b>Voltage</b>	230V AC ~ 50Hz
<b>Max Operating current</b>	13A (3A inductive)
<b>Rated Trip current</b>	30mA
<b>Typical Trip Speed</b>	<40mS
<b>RCD contact break</b>	Double Pole
<b>Conforms to</b>	BS 7288:2016 & BS 1363

### Switched Sockets



**M22SW**  
**RCD Switched Socket**  
 White  
 H86.5 x W147 x D35mm  
 (16mm surface projection)  
 Pack Qty 1

**M22SM**  
**RCD Switched Socket**  
 Metalclad  
 H86.5 x W147 x D50mm  
 Pack Qty 1

### Unswitched Sockets



**M22W**  
**RCD Unswitched Socket**  
 White  
 H86.5 x W147 x D35mm  
 (16mm surface projection)  
 Pack Qty 1

**M22M**  
**RCD Unswitched Socket**  
 Metalclad  
 H86.5 x W147 x D50mm  
 Pack Qty 1

### RCD Fused Connection Units



**M92W**  
**RCD Fused Connection Unit**  
 White  
 H86.5 x W86.5 x D37mm  
 (16mm surface projection)  
 Pack Qty 1

**M92M**  
**RCD Fused Connection Unit**  
 Metalclad  
 H87 x W87 x 507mm (inc. back box)  
 Pack Qty 1

## RCD Plug

- ✓ Suitable for use with all makes of electrical and gardening appliances
- ✓ Electrically latched - will need to be reset after power loss
- ✓ Cuts the power for added protection against electrocution
- ✓ All products have a separate 'Test' & 'Reset' buttons
- ✓ Clear indicator window, flags Orange when 'On'

TECHNICAL INFORMATION	
Voltage	230V AC ~ 50Hz
Max Operating current	13A
Rated Trip current	30mA
Typical Trip Speed	Less than 40mS (typical)
RCD Contact Break	Double Pole
Conforms to	BS 7071 & BS 1363



### RCDP RCD Plug

White  
H123 x W49.5 x 54mm  
(not inc. cable gland 24mm)  
Pack Qty 1

## RCD Adaptor & In-Line

- ✓ Suitable for use with all makes of electrical and gardening appliances
- ✓ Electrically latched (Active) - reset on power loss
- ✓ Cuts the power for added protection against electrocution
- ✓ Large, clear indicator window, flags red when "on"
- ✓ No need to remove from socket to reset unit (RCDA-C)
- ✓ 1 Year Warranty

TECHNICAL INFORMATION	
Voltage	230V AC ~ 50Hz
Max Operating current	13A (3A inductive) 4A inductive for RCDA-C
Rated Trip current	30mA
Typical Trip Speed	<40mS (typical)
RCD Contact Break	Double Pole

**RCDL**  
**Heavy Duty In-Line RCD**  
IP55 Rated, 4A inductive  
Fully portable  
Pack Qty 1



**RCDA**  
**RCD Adaptor**  
IP40 Rated  
H140 x W59 x D46mm  
Pack Qty 1

