


FEATURES

- ▶ Panel mounting
- ▶ Max switching 10A
- ▶ 16 mounting thread size with lock-ring
- ▶ Switching delay 5 - 15 seconds

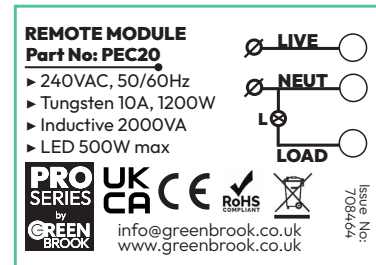

PEC20 Wiring Label

Note:

LED compatible can run loads of up to 500 watts, the total number of light fittings should be limited to no more than **10** fittings.

TECHNICAL INFO

Product	PEC20
Description	Photocell Remote Module
Barcode	5012739 622892
Rated Voltage	220V - 240V
IP Rating	IP65
Light Level	On @ 10 Lux / Off @ 50 Lux
Max Switching Capacity	10A
Sensor Type	Photoresistor
Load Rating	Tungsten 1200W Inductive 2000VA LED 500W max (max 10 fittings)
Operating Temp	- 40° - + 70°C
Class Type	II
Switching Delay	5 - 15 seconds
Electrical Life	100,000 cycles
Product Weight	50g
Dimensions	45.6 x 28.5 x 52mm
Guarantee	1 Year
Conforms to	EN IEC61058-1, EN61058-1-2, BS EN61058-1, BS EN61058-1-2 & BS EN IEC61547

PEC20 PHOTOCELL REMOTE MODULE