


K21S-WP SINGLE RCD PANEL MOUNTING SOCKET

**TYPE A RCD
BS 7288-2016+A1:2022**

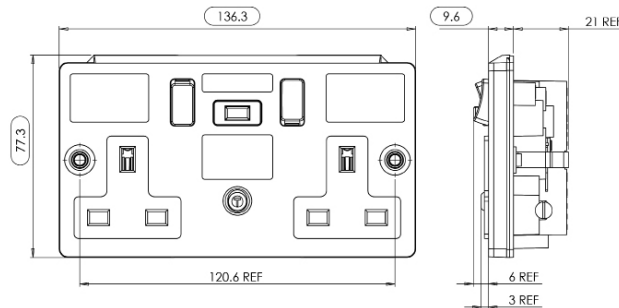

K22S-WP TWIN RCD PANEL MOUNTING SOCKET

FEATURES

- ▶ Mechanically latched (does not need resetting after a power loss)
- ▶ Red & Green dual flag system to show power on/off
- ▶ High intensity LED power on indicator
- ▶ Cuts the power for added protection against electrocution
- ▶ K22S-WP has Twin earth terminals

TECHNICAL INFO

Product	K21S-WP	K22S-WP
Product Finish	White	
Barcode	5012739 646829	5012739 646836
Product Weight	130g	191g
Product Dimensions	83.2 x 83.2 x 30.8mm	136.3 x 77.3 x 30.6mm
Voltage	230V AC ~ 50Hz	
Max Operating Current	13A (13A Inductive)	
IP Rating	IP40	
Rated Trip Current	30mA	
Typical Trip Speed	Less than 20mS (typical)	
RCD Contact Break	Double Pole	
Rated Short Circuit Breaking & Making Capacity	250A	
Rated Conditional Short-Circuit Current	1500A Power Factor Range .93 to .98	
Latching	Mechanical - no need to reset after a Power Loss (Passive)	
Responsive To	Pulsating DC earth faults	
Main Housing Material	Polycarbonate	
Guarantee	3 Years	
Conforms To	BS 7288-2016+A1:2022, BS1363-2:2016+A1:2018	