

**24HR TIMER
SOCKET**

in@chronox

Part No:TS70A

PRO by **GREEN**
SERIES **BROOK**

Please read the instructions fully before attempting installation.

IMPORTANT

This unit should be installed to current IET Wiring Regulations.

A qualified electrician is required for installation.

WIRING INSTRUCTIONS

1. TURN OFF the electricity supply at the consumer unit or fuse box before beginning any fitting. Take out the appropriate fuse or turn off at the circuit breaker.
2. Remove the existing double socket from the wall, typically by unscrewing the two retaining screws on either side of the socket faceplate. Disconnect the wiring conductors from the double socket.
3. Fit the wiring conductors into the correct terminals of the socket converter:
LIVE (L) = RED OR BROWN
NEUTRAL (N) = BLACK OR BLUE
EARTH (E) = GREEN/YELLOW

Check that all bare wires are firmly housed in the correct terminals before clamping, tightening in place with the terminal screw. The screw must clamp the copper wire not the insulation fitted to the wire. If the earth conductors are bare they must be sleeved with appropriate green/yellow sleeve.

4. Using the two screws supplied, attach the socket to the original dry lining box. Ensure that no wiring becomes trapped when tightening the screws.
5. Turn the mains electricity back on at the consumer unit or fuse box, replacing any fuse or reactivating the circuit breaker and test the installation is correctly wired.

PLEASE NOTE: Electricity is dangerous and can kill. If you are in any doubt how to fit your socket or there appears to be damage to the wiring, consult a qualified electrician.

It is only possible to be fitted in a plastic dry lining or plastic surface boxes conforming to the relevant British Standard. A minimum of 2.5mm², 3 core cable should be used to wire mains sockets.

SETTING THE CLOCK

1. Turn the dial in the direction of the arrow (clockwise) until the correct time and day is exactly opposite the time set marker on the clockface (24hr clock).
2. For the "ON" period push the switching green segments out towards the outside edge of the face. The timer will operate for the duration set (each segment is approximately 15 minutes duration). i.e. if it is required to switch on between 16:00 and 18:00, all the segments between these times should be moved to the outer edge.

SETTING THE PROGRAMME


By moving the switch located centre right of clockface the following operations can be achieved.

- ON** = Timer permanently 'ON'.
AUTO = Timer will work to set program
OFF = Timer permanently 'OFF'.

TECHNICAL INFORMATION

Rated Voltage:	230V, AC 50Hz
Maximum Operating Current:	13A (4A Inductive)
Power Consumption:	0.9W
Time Storage:	96 On/ Off settings
Operation Temperature:	-5°C to +40°C
Shortest Switching Time:	15 Minutes
Programmable:	15 Minutes
Dimensions:	W146 x H86.8 x D22mm
Conforms To:	BS 1363-2, EN60730-1, EN 60730-2-7

DIMENSIONS

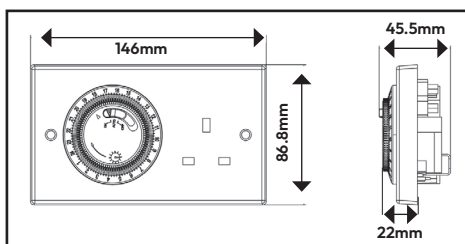

NOTE:

Product & Packaging Disposal

When disposing of this item and its packaging please follow local regulations and use an appropriate waste disposal centre.

See GreenBrook website for further details.

GUARANTEE

Your 24hr Socket Timer
is guaranteed for 1 year from
the date of purchase.

This is in addition to your statutory rights.

**PLEASE KEEP THESE INSTRUCTIONS
SAFE FOR FUTURE REFERENCE**