

# Ceiling Accessories

The GreenBrook energy saving PL Pendant ceiling rose meets the latest building regulations. It features an intelligent built-in electronic control gear, with a standard 3 plate loop-in ceiling rose and flex. Complies with latest British and European Standards. The GreenBrook dimmable pull switch is able to dim standard and low voltage lighting.

TECHNICAL DATA SHEET




PLPA

GB2654-T2



GB2663-T2

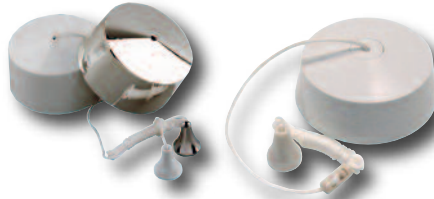

DIMPULLSW-C

GB2641



GB2319

	PLPA	GB2654-T2	GB2663-T2	DIMPULLSW-C	GB2641	GB2319
<b>Product Finish</b>	White	White	White	Chrome/White	White	White
<b>Description</b>	Energy saving PL Pendant not suitable for dimming (Complete with Shade Ring)	6" Pendant Lampholder	BC Battenholder HO 3 terminal & earth - Complete with ceiling rose, clear plastic terminal plate & heat resistant metal lamp holder	Dimmable Pull Switch Comes complete with both white & chrome covers & acorns	Pull cord switch	45A DP Switch with neon
<b>Product Dimensions</b>	Overall length not including lamp 245mm	-	-	78mm Dia	83mm Dia	86mm x 86mm
<b>Product weight</b>	131g	117g	120g	114g	95g	197g
<b>Barcode</b>	5012739628559	5012739619847	5012739619861	5012739628009	5012739619823	5012739619687
<b>Wattage</b>	10-18W, 4 pin	-	-	<b>Standard Lighting</b> Max Load:250W <b>LV Lighting</b> Max load: 170W Not suitable for LEDs	1380W	10350W
<b>Voltage</b>	230V ~ 50Hz	-	-	-	-	-
<b>Pack Quantity</b>	5	10	10	1	10	10
<b>Max Operating Current</b>	-	-	-	1.1A	6A, 2 way	45A, DP
<b>Guarantee</b>	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
<b>Main housing material</b>	Urea	Urea	Urea	Urea	Urea	Urea
<b>Certification &amp; Conformity</b>	EN 60598-2-1	BS 67: 1987	BS 67: 1987	EN 60669-2-1	BS EN 60669-1	BS EN 60669-1