


Lever & Push Fit Connectors

NORSLO

- + Ideal use for Low Voltage lighting systems, Junction boxes
- + Can accept stranded, solid & flexible wires
- + Re-usable


- + Ideal use for Low Voltage lighting systems, Junction boxes, consumer units
- + Transparent casing for checking conductor is secure

Lever Connectors

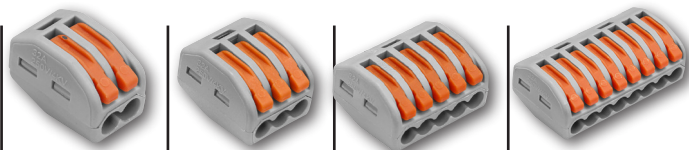

	LC2P	LC3P	LC5P	LC8P
Description	2 Pole Lever Connector	3 Pole Lever Connector	5 Pole Lever Connector	8 Pole Lever Connector
Pack Qty	100	100	50	50
Barcode	5012739 649042	5012739 649059	5012739 649066	5012739 649073
Current	32A	32A	32A	32A
Voltage	250V	250V	250V	250V
Solid Conductor	0.8 - 2.5mm ² 28 - 12 AWG	0.8 - 2.5mm ² 28 - 12 AWG	0.8 - 2.5mm ² 28 - 12 AWG	0.8 - 2.5mm ² 28 - 12 AWG
Stranded Conductor	0.8 - 2.5mm ² 28 - 12 AWG	0.8 - 2.5mm ² 28 - 12 AWG	0.8 - 2.5mm ² 28 - 12 AWG	0.8 - 2.5mm ² 28 - 12 AWG
Striping Length	12mm	12mm	12mm	12mm
Weight	2.5g	4g	7g	11g
Guarantee	1 Year			
Conforms To	EN 60998			

Push-fit Connectors

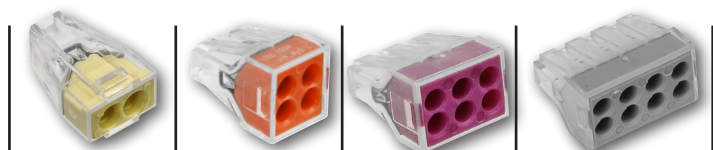

	PFC2	PFC4	PFC6	PFC8
Description	2 Push-Fit Connector	4 Push-Fit Connector	6 Push-Fit Connector	8 Push-Fit Connector
Pack Qty	100	100	100	100
Barcode	5012739 649080	5012739 649097	5012739 649103	5012739 649110
Current	24A	24A	24A	24A
Voltage	250V	250V	250V	250V
Solid Conductor	0.75 - 2.5mm ² 18 - 12 AWG	0.75 - 2.5mm ² 18 - 12 AWG	0.75 - 2.5mm ² 18 - 12 AWG	0.75 - 2.5mm ² 18 - 12 AWG
Stranded Conductor	1.5 - 2.5mm ² 18 - 12 AWG	1.5 - 2.5mm ² 18 - 12 AWG	1.5 - 2.5mm ² 18 - 12 AWG	1.5 - 2.5mm ² 18 - 12 AWG
Striping Length	12mm	12mm	12mm	12mm
Weight	1g	2g	3g	3g
Guarantee	1 Year			
Conforms To	EN 60998			

TECHNICAL DATA SHEET