
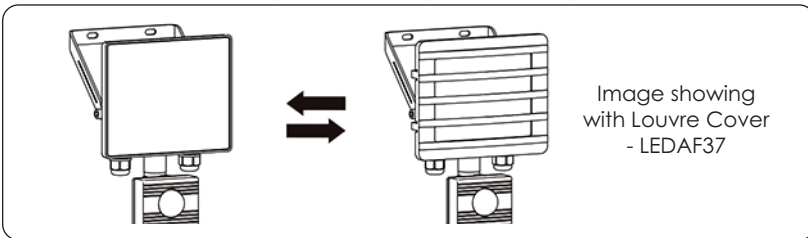



IMPORTANT

This product should be installed by a competent person and in accordance with the current IET Wiring Regulations.
If in doubt, consult a qualified electrician.

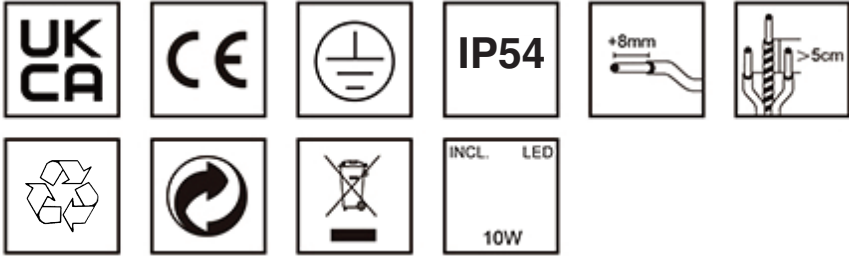



INSTALLATION & OPERATION

Single Floodlight Installation

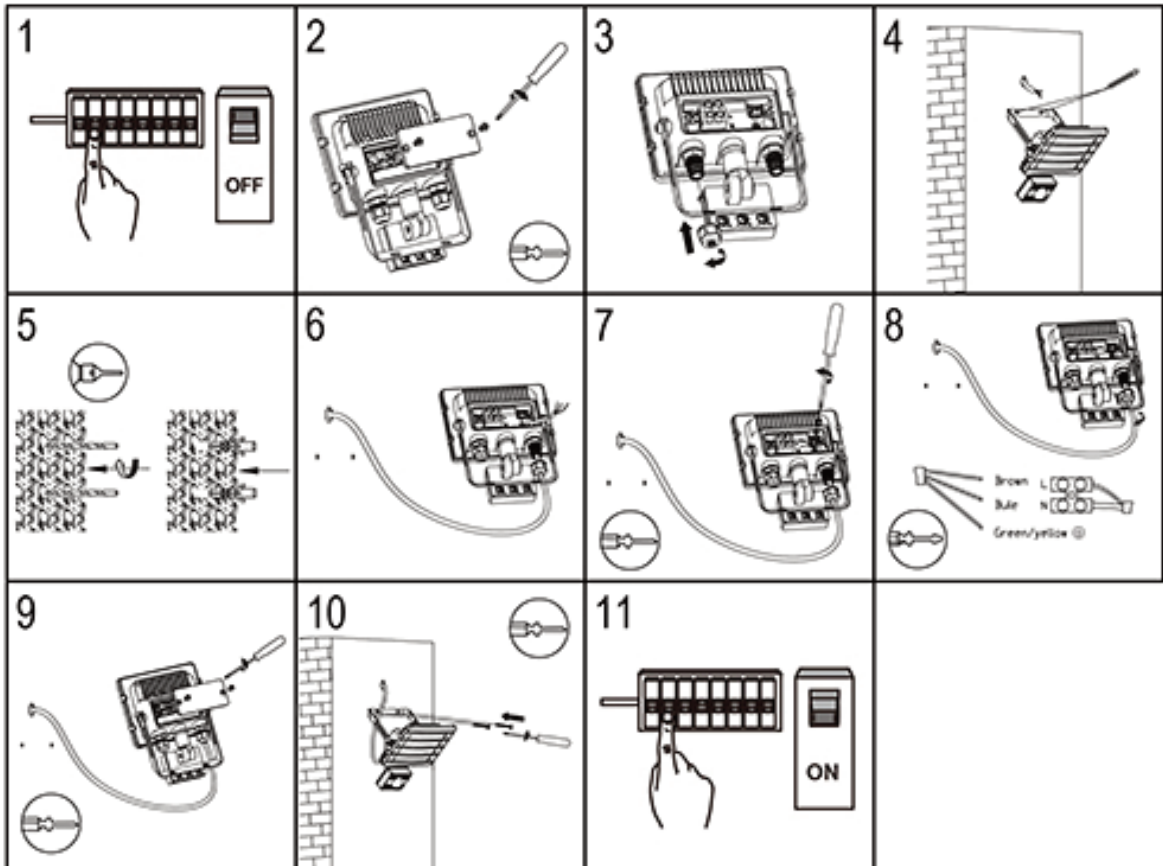


Group Floodlight Installation

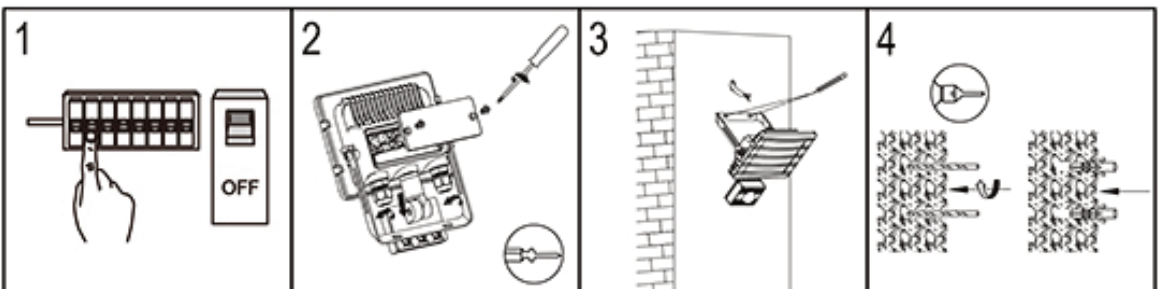


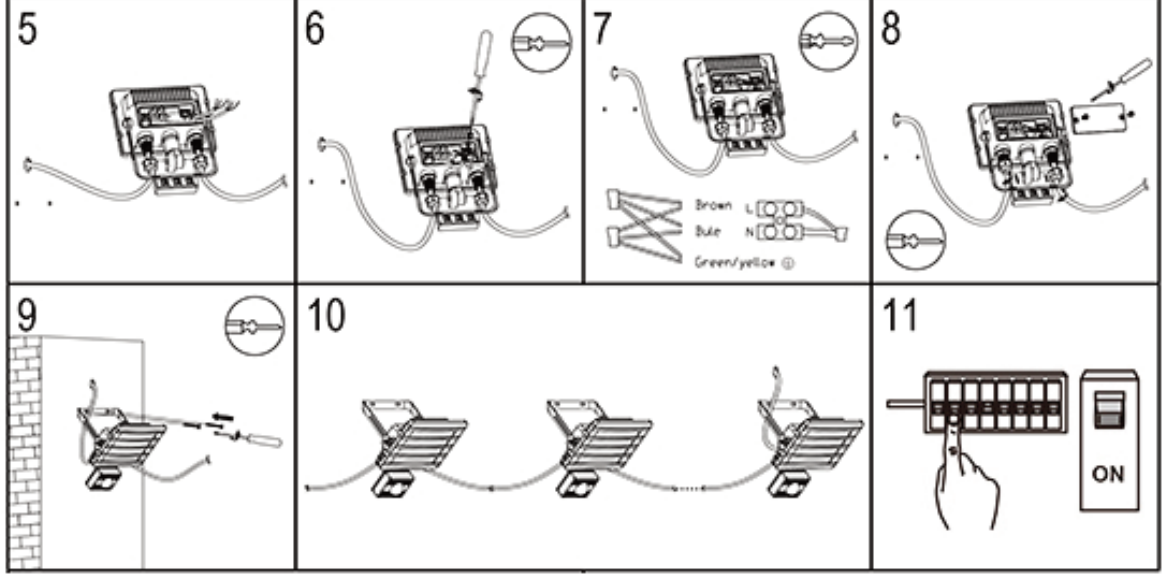

To Activate Sensor Override Mode


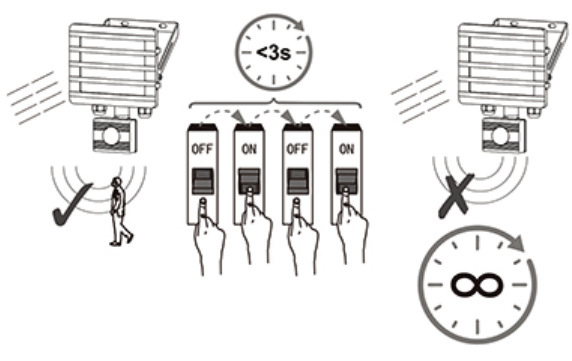


To De-activate Sensor Override Mode

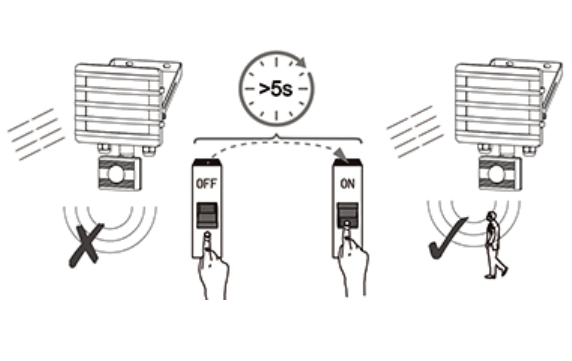

TECHNICAL INFORMATION

Rated voltage:	230 - 240V AC ~ 50/60Hz
Wattage:	10W
Lumens:	900
IP Rating:	IP54
Colour Temperature:	5,000K
Class Type:	Class 1
No of LED's:	15
CRI:	80
Detection Distance:	0 - 12 metres
Tine Delay:	10 secs min to 10 mins max
Mount Height:	2.5 metres
Housing:	Heavy duty Aluminium body & clear glass diffuser
Conforms To:	BS EN 60598

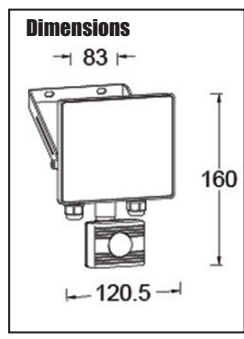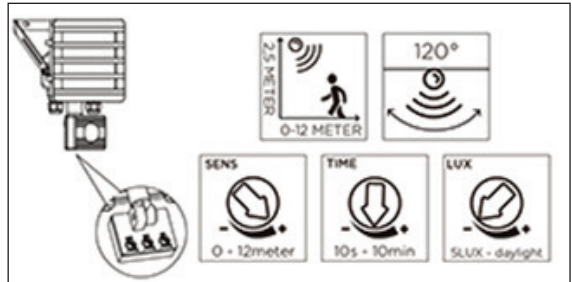

GUARANTEE
 Your GreenBrook Alfresco Fitting
 is guaranteed for 5 years from
 the date of purchase.
 This is in addition to your statutory rights.

Please keep these instructions for future reference.

INSTALLER - Please pass instruction manual onto the owner of the unit.

**GREEN
 BROOK**
 ELECTRICAL
 WEST ROAD . HARLOW
 ESSEX . CM20 2BG . UK
 info@greenbrook.co.uk
 www.greenbrook.co.uk