

NOVA14 & NOVA22 Range - IP65, LED Circular Bulkheads

**GREEN
BROOK**
ELECTRICAL



- + Opal Polycarbonate diffuser
- + Supplied with Matt Black narrow bezel
- + Conduit entry points for through wiring
- + Additional bezels are available in Matt Black complete with tamper-proof screws or a Gloss white clip on bezel
- + Range consists of Standard / Emergency / Microwave Presence Detector / Emergency with Microwave Presence Detector



Shown with White Gloss White
Clip on Bezel


NV14WT - 330mm dia x 90mm high
NV22WT - 405mm dia x 90.2mm high



Shown with Matt Black
Tamper-proof Screws Bezel

NV14BT - 320mm dia x 90mm high
NV22BT - 395mm dia x 90.2mm high

Dimensions:

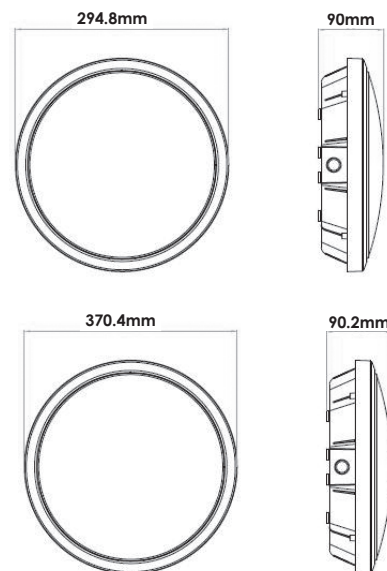

Microwave Presence Detector	NV14M	NV22M
Wattage	13W	22W
Barcode	5012739650970	5012739651038
Power Rating	230V AC ~50Hz	
Class	Class II	
Running Current	302mA	502mA
Lumen Output (Lm)	1100	2200
Lumens per Watt	85	102
IP Rating	IP65	
Power Factor	>0.5	>0.9
CRI	>80	
Life Expectancy	50,000 hrs	
SDCM*	<6	
Beam Angle	120°	
Colour Temperature	4,000K	
Operating Temperature	-10°C to +40°C	
Detection Range	Maximum - 10M dia x 6 Metres high	
Lux Level	2,10,50 Lux or disable	
Installation Height	6 Metres	
Time Delay	5 Secs, 90 Secs, 5 Mins, 15 Mins	
Microwave Sensor	Ultranik	
Weight	825.5g	1375g
Dimensions	294.8mm Diameter X 90mm high	370.4mm Diameter X 90.2mm high
Guarantee	3 Years	
Conforms To	BS EN60598-1	

*Standard Deviation Colour Matching

**GREEN
BROOK**
ELECTRICAL

Tel: 01279 772 772

Fax: 01279 422 007

Email: sales@greenbrook.co.uk

www.greenbrook.co.uk



Rev2-18.12.20