


# -PowerBreaker-

## Mains Isolator Switch

The PowerBreaker range of circuit protection devices are designed and tested for use with PowerBreaker Consumer Units.

These devices **MUST** be installed by a qualified electrician in accordance with the latest wiring regulations (BS7671).

- + 100A
- + Double Pole

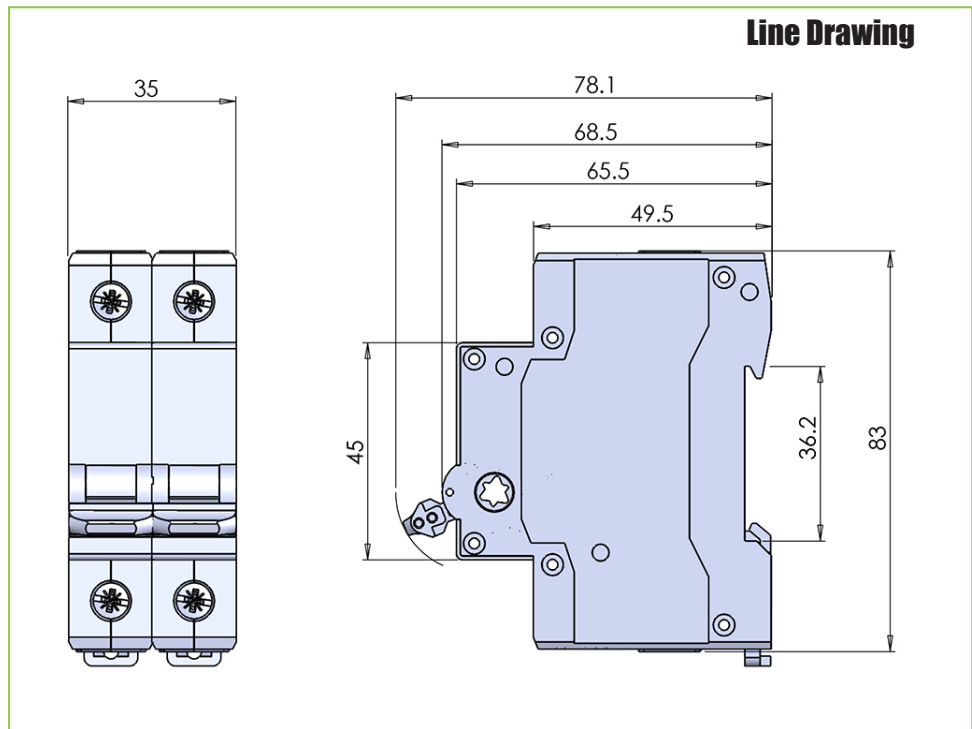

	<b>PBI</b>
<b>Rated Residual Current</b>	100A
<b>Pack Quantity</b>	6
<b>Barcode</b>	5012739 648526
<b>Number of Poles</b>	2P (Double Pole)
<b>Rated Voltage</b>	230/240VAC
<b>Rated Frequency</b>	50/60Hz
<b>Terminal Capacity</b>	1 -35mm <sup>2</sup>
<b>Mechanical Endurance</b>	10,000 times
<b>Electrical Endurance</b>	4,000 times
<b>Ambient Temperature</b>	- 25°C to +55°C
<b>Storage Temperature</b>	- 40°C to +70°C
<b>Torque (Recommended minimum tightening)</b>	2.5Nm
<b>Din Rail Mounting</b>	Yes
<b>Guarantee</b>	3 Years
<b>Conforms To</b>	BS EN 60947

**TECHNICAL DATA SHEET**

