

SHARK RANGE - IP65 LED Wall Packs

- + Adjustable colour temperature 3,000K/4,000K
- + Selectable wattage & lumen output
- + Suitable for rear & side cable entry
- + 5 year Guarantee
- + Conforms to BS EN 60598




Front View



Side View



Rear View

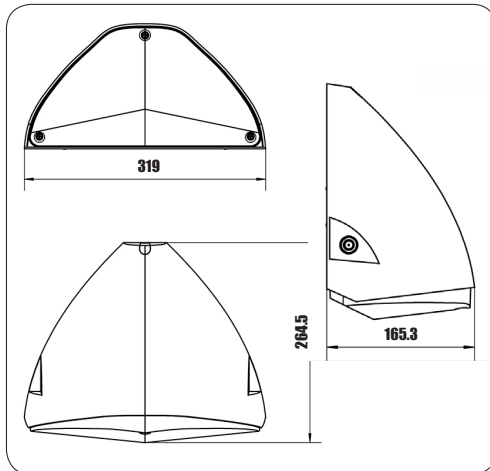

	SHARKST	SHARKEM
Description	IP65 Wall Pack Standard Fitting	IP65 Wall Pack Emergency Fitting
LED Chip	SMD 2835 3,000K 84pcs + 4,000K 84pcs	SMD 2835 3,000K 84pcs + 4,000K 84pcs
Barcode	5012739 652691	5012739 652707
Power Rating	220V/240V AC ~50Hz	220V/240V AC ~50Hz
Wattage	13W / 18W / 28W ±10%	13W / 18W / 28W ±10%
Colour Temp	3000K & 4,000K	3000K & 4,000K
Class	I	I
IP Rating	IP65	IP65
Lumens	13W - 1800LM / 18W - 2500LM / 28W - 3500LM ±10%	13W - 1800LM / 18W - 2500LM / 28W - 3500LM ±10%
Lumens Per Watt	3,000K - 120 lm/W / 4,000K - 125 lm/W	3,000K - 120 lm/W / 4,000K - 125 lm/W
Driver	TCI Driver - FRO FLAT 30 BI/TCI/127573 CN	TCI Driver - FRO FLAT 30 BI/TCI/127573 CN
Operating Temp Range	-20°C - +40°C	-20°C - +40°C
Beam Angle	120°	120°
Main Housing	Die Cast Aluminium Body Polycarbonate Diffuser	Die Cast Aluminium Body Polycarbonate Diffuser
Power Factor	>0.9	>0.9
SDCM	<6	<6
Emergency Converter	-	Streamer YH11-203105Li
Emergency Duration	-	>3H
Emergency Lumens	-	275lm
Battery	-	LiFePO4 6.4V 1.5Ah
Product Weight	1820g	2157g
Dimensions	H264.5 X W319 X D165.3mm	H264.5 X W319 X D165.3mm
Guarantee	5 Years	5 Years
Conforms To	BS EN 60598	BS EN 60598