

- Super efficient light
- Flicker free
- Dimmable
- Certified for 30, 60 or 90 minute fire rated ceilings
- Complete with quick connect driver
- Additional bezels available - Gold, Matt Black, Satin Chrome & Polished Chrome
- Conforms to EN 60598-1,-2-2 and EN 61347-2-13

Bezel Finishes



Black




Satin Chrome



Polished Chrome



Gold



	V73000W	V74000W	V7T3000W	V7T4000W	V7AG3000W	V7AG4000W
Product Finish	White					
Downlight Style	Fixed		Tilt		Anti-Glare	
Cut out	73mm		83mm		73mm	
Size	W85 x H61mm		W95 x H70mm		W85 x H72mm	
Product weight	220g		260g		230g	
Barcode	5012739 645778	5012739 645785	5012739 645792	5012739 645808	5012739 645815	5012739 645822
IP Rating	IP65					
Lamp Type	LED					
Beam Angle	55°					
Colour Temp	3,000K	4,000K	3,000K	4,000K	3,000K	4,000K
Tilt Angle	N/A		30° Inclusive (15° each side)		N/A	
Class	II					
Luminaire Lumens Output	700, 100 lm/W	720, 103 lm/W	700, 100 lm/W	720, 103 lm/W	610, 84 lm/W	680, 96 lm/W
Voltage	230V ~ 50Hz					
Wattage	7W					
CRI	>80					
Ballast Type	LED Driver					
Guarantee	5 year					
Certification & Conformity	Conforms to Part B, C, E & L					

5 Year Warranty


20A Lighting Connector

- suitable for use with the 'VELA' range

- ▶ Time saving product for all your connecting requirements

Box Qty
50


QUICK3
Connekt

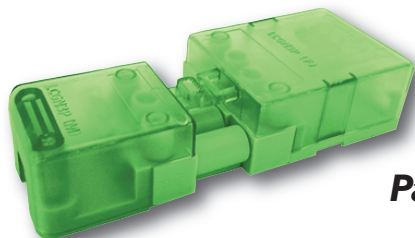

Part No: LCGN3P

QUICK4
Connekt

- Ideal for emergency lighting

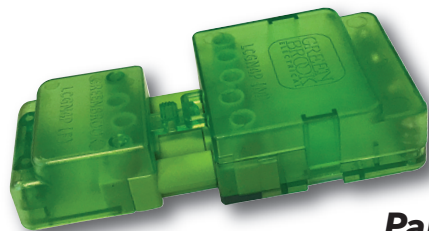

Part No: LCGN4P

LED 3W Emergency Driver

- suitable for use with 'VELA' Range

- ▶ Built in battery supplying 3 hours emergency operation in light of a mains failure
- ▶ Quick & easy to connect
- ▶ Compact & lightweight - screwless assembly
- ▶ Separate small green LED indicator giving status of battery charge
- ▶ Bezel mount for LED - for ease of installation in ceilings



Part No: LEDLEP